

This guide will explain how to replace the Loudspeaker in a Huawei P8 Lite.

A hand is holding an iPhone 12 with the back cover removed, revealing the internal battery and components. A yellow battery cable is visible, connected to the battery. A black cable is plugged into the bottom port. The battery has a label with a QR code and text: "2015-05-24", "17441CF524", "65788E", "B000", "100%", "100%", "100%".

## INTRODUCTION


This guide will explain how to remove and replace the Loudspeaker for the Huawei P8 Lite.

---

### TOOLS:


- [Spudger](#) (1)
  - [Phillips #000 Screwdriver](#) (1)
  - [54 Bit Driver Kit](#) (1)
  - [T5 Torx Screwdriver](#) (1)
-

## Step 1 — Loudspeaker

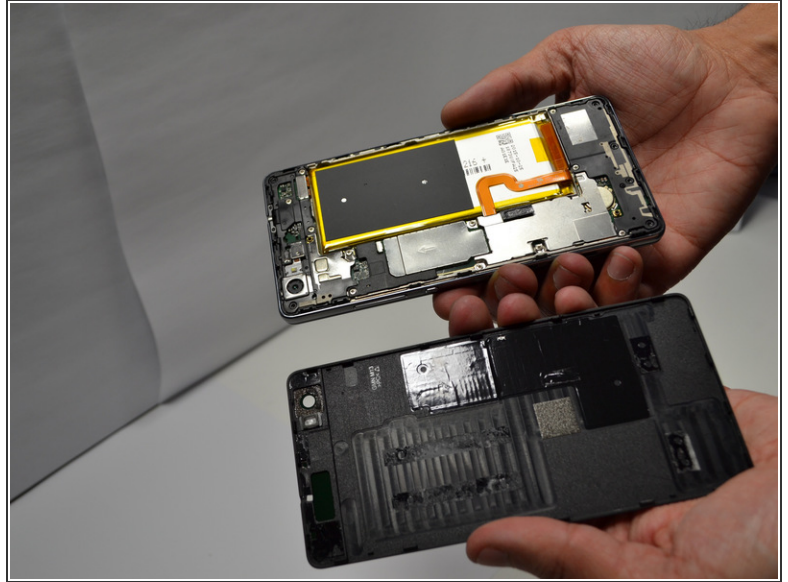



- Begin by removing the back cover of the device with the [Spudger](#). To prevent damage to the back cover, begin removing the cover half an inch to the right of the headphone jack and continue prying around the perimeter of the device.

## Step 2

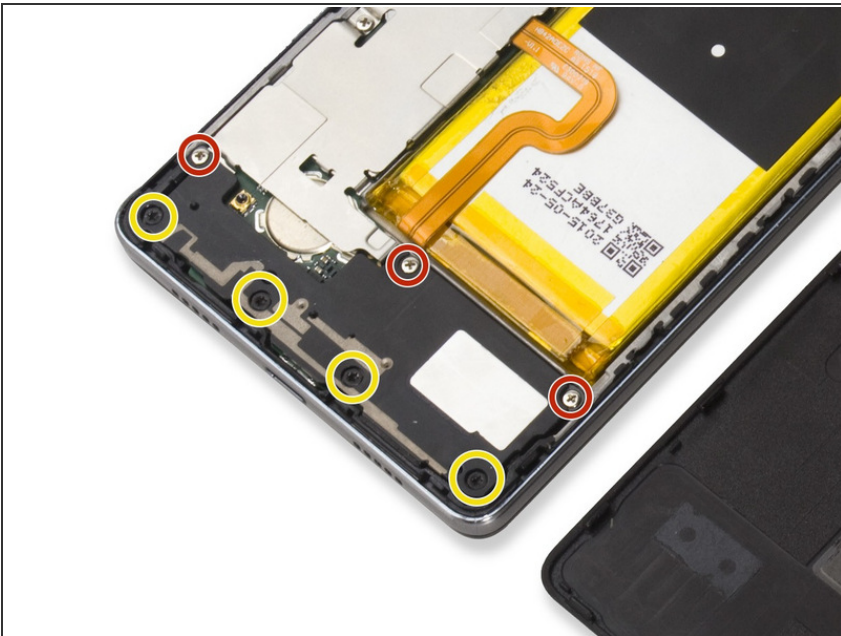

- Locate the Loudspeaker at the bottom of the device.
- Remove the four black screws using the [T5 Torx Screwdriver](#).
- Then use the [Phillips #000 Screwdriver](#) to remove the three silver screws.

## Step 3

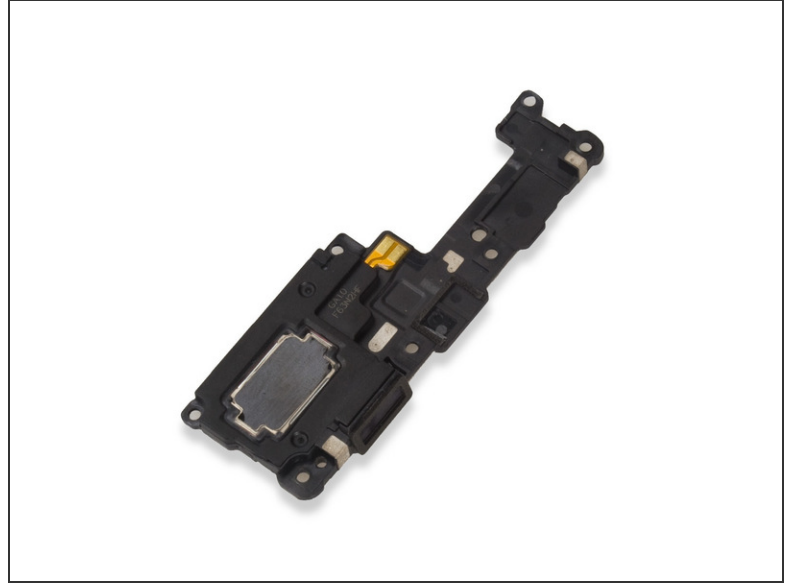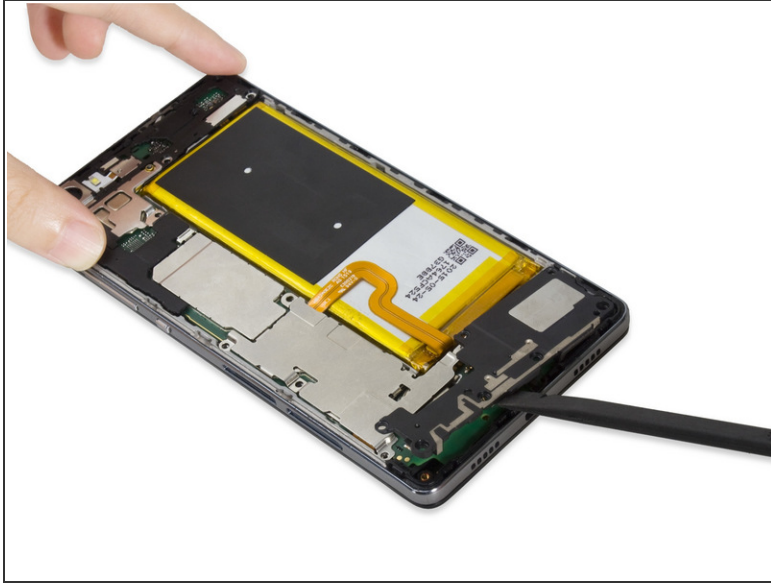

- Use the [Spudger](#) to gently remove the Loudspeaker from the device. Place the replacement Loudspeaker into the device.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-28 08:53:08 PM.